


CERAMIC CAPACITORS

Taping Specifications 陶瓷電容器編帶包裝規格

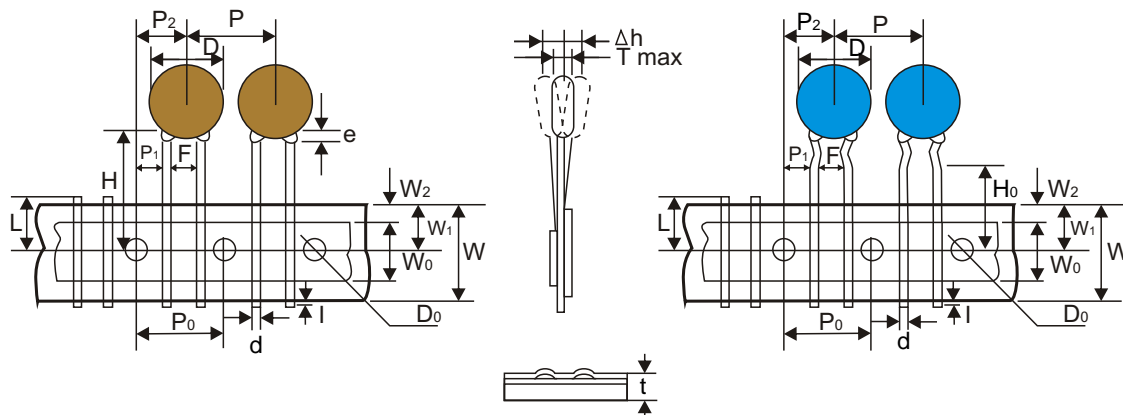

Item 項目	Symbol 符號	Specifications 規格		Remarks 備註
		Value 尺寸	Tolerance 誤差	
Body Width 本體直徑	D	11.0	Max.	
Body Thickness 本體厚度	T	3.5	Max.	
Lead-wire diameter 引線直徑	d	0.6	+0.06 -0.05	
Pitch of component 部品間寬距	P	12.7	± 1.0	
Feed hole pitch 進料孔寬距	P0	12.7	± 0.3	Cumulative pitch error: 1.0mm/20pitch 累計誤差
Feed hole center to lead 進料孔到引線寬	P1	3.85	± 0.7	To be measured at bottom of clinch 在底部量測
Hole to component center 進料孔到部品寬	P2	6.35	± 1.3	
Component alignment 部品排列偏差	h	0	± 0.2	
Tape width 紙帶寬度	W	18.0	+1.0 -0.5	
Hold-down tape width 膠帶寬度	W0	11.0	Min.	
Hole position 進料孔位置	W1	9.0	+0.75 -0.5	
Hole-down tape position 膠帶位置	W2	3.0	Max.	
Height of component from Tape center 部品與紙帶中心高度	H	20.0	+1.0 -0.5	For Straight Lead Type 直引線型
	H0	16.0	± 0.5	For Kinked Lead Type 彎引線型
Lead-to-lead distance 引線寬度	F	5.0	± 0.8	
Lead-wire protrusion 引線凸出量	l	2.0	Max.	
Feed hole diameter 進料孔直徑	D0	4.0	± 0.3	
Total tape thickness 總紙帶厚度	t	0.7	± 0.2	Ground paper 底紙厚度 : 0.5± 0.1mm
Length of snapped lead 裁切引線長度	L	11.0	Max.	
Coating rundown on leads 引線漆長	e	1.5	Max.	

AMMOPACK 編帶盒裝 2000pcs per Box

REEL 編帶捲裝 2000 or 2500pcs per Reel

Unit: mm

